


# HSS DRILL BIT

## HSS-G PRO GROUNDED

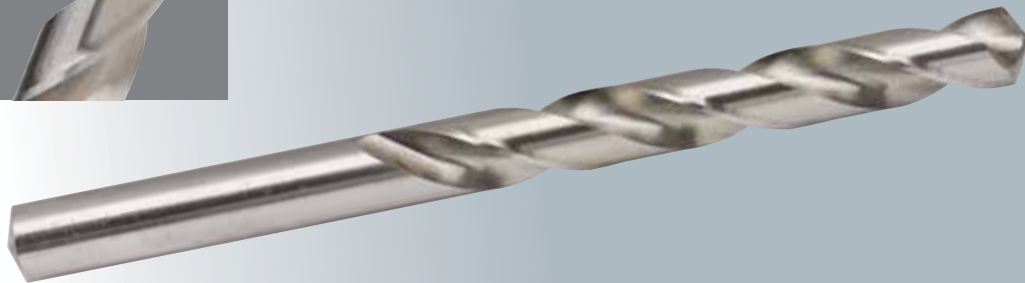

Ø Max 12.7

**FAST**

### Features



- Fully ground drill bit.
- 118° tip angle.
- Split point.
- Flute type N.
- Diameter tolerance h8.

### Benefits

- Starting precision.
- Quick penetration and easy drilling.

### Applications

- Unalloyed and alloyed steels (up to 900N/mm<sup>2</sup>), cast iron.



DIN 338



Ø	Ref.	Gencod	Qt.
<b>Short Serie</b>			
2	726YD02	4013769433886	10
2,5	726YD02.5	4013769433893	10
3	726YD03	4013769433909	10
3,2	726YD03.2	4013769433916	10
3,5	726YD03.5	4013769434654	10
4	726YD04	4013769433923	10
4,2	726YD04.2	4013769433930	10
4,5	726YD04.5	4013769433947	10
5	726YD05	4013769433954	10
5,5	726YD05.5	4013769433961	10
6	726YD06	4013769433978	10
6,5	726YD06.5	4013769433985	10
7	726YD07	4013769433992	10
8	726YD08	4013769434005	10
8,5	726YD08.5	4013769434012	10
9	726YD09	4013769434364	10
10	726YD10	4013769434029	10
11	726YD11	4013769434036	5
12	726YD12	4013769434043	5
13	726YD13	4013769434050	5
14	726YD14	4013769434067	2
16	726YD16	4013769434074	2
18	726YD18	4013769434661	2
20	726YD20	4013769434678	2

