
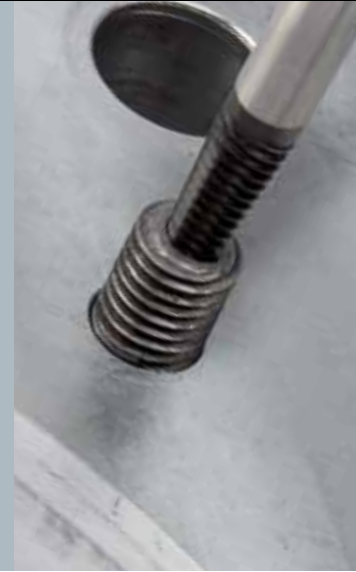


# SCREW EXTRACTOR

## SCRIBING IRON

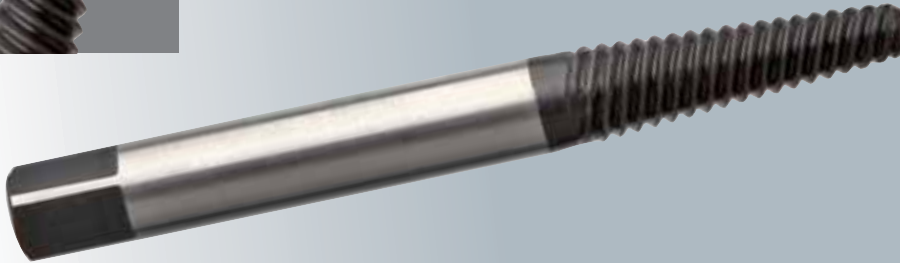

### Features

- Forged tool.
- High-quality vanadium chromium steel.
- reversed pitch: left-hand pitch.
- Polished finish.
- Square shank.


### Benefits

- Ideal for removing screws with broken or damaged heads.

### Advices

- Drill the broken screw with the HSS-C 5% cobalt (731-700) or HSS G3 (702-703).
- For the tool holder, use an adjustable tap wrench (part no. 827); use an adjustable spanner for very large diameters and an open-ended spanner or a ratchet spanner for small spaces.

N°	Screw to extract	Ø drilling	SW mm	N° tap wrench	adjustable spanner	Lg	Ref.	Gencod	Pack
1	M3-6	2.50	3.20	1	yes	51	U5000010	4013769436955	BULK
2	M6-8	3	4	1-2	yes	60	U5000020	4013769436962	BULK
3	M8-11	4.50	5.20	1-2	yes	68	U5000030	4013769436979	BULK
4	M11-14	6	6.40	2-3	yes	76	U5000040	4013769436986	BULK
5	M14-18	8	8.85	3	yes	86	U5000050	4013769436993	BULK
6	M18-24	11	11.80	3	yes	93	U5000060	4013769437006	BULK
7	M24-33	14	15	-	yes	96	U5000070	4013769437020	BULK
8	M33-50	21	20	-	yes	100	U5000080	4013769437013	BULK

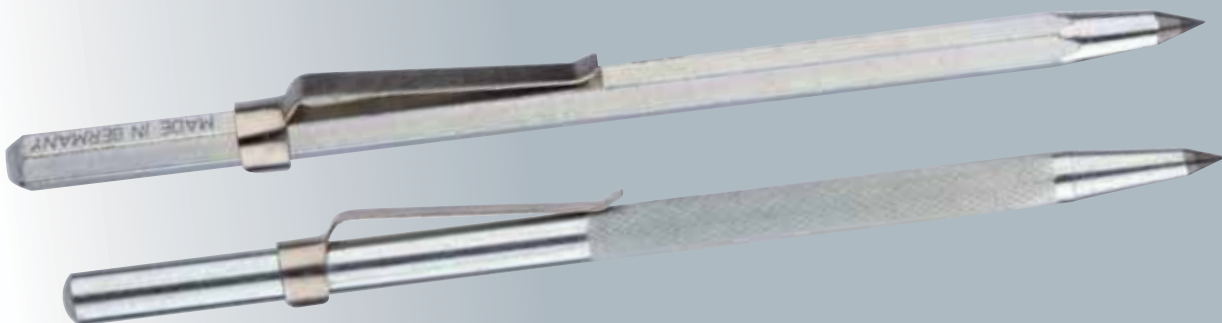

### Features

- Hexa or rounded scribing irons - diameter 6 mm

### Benefits

- For a precise marking on steel



Lg	Ref.	Gencod	Pack
<b>Hex shank scribing iron</b>			
140	U8000000	4013769431295	BULK
140	U8000001	4013769431318	F
<b>Round shank scribing iron</b>			
140	U8080010	4013769437037	BULK
140	U8080011	4013769431332	F